



SITRANS LR560

Overview



SITRANS LR560 2-wire, 78 GHz FMCW radar level transmitter for continuous monitoring of solids in silos to a range of 100 m (329 ft).

Benefits

- Rugged stainless steel design for industrial applications
- 78 GHz high frequency provides very narrow beam, virtually no mounting nozzle noise, and optimal reflection from sloped solids
- Aimer option to direct beam to area of interest, such as draw point of cone
- Lens antenna is highly resistant to product build up
- Air purge connection is included for self-cleaning of extremely sticky solids
- Local display interface (LDI) allows local programming and diagnostics

Application

SITRANS LR560's plug and play performance is ideal for most solids applications, including those with extreme dust and high temperatures to 200 °C (392 °F). Unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. SITRANS LR560 includes an optional graphical local display interface (LDI) that improves setup and operation using an intuitive Quick Start Wizard, and echo profile display for diagnostic support. Startup is easy using the Quick Start wizard with a few parameters required for basic operation. SITRANS LR560 measures practically any solids material to a range of 100 m (328 ft).



- Key Applications: cement powder, plastic powder/pellets, grain, coal, wood powder, fly ash

Configuration

Installation

Note:

- Beam angle is the width of the cone where the energy density is half of the peak energy density
- The peak energy density cone is directly in front of and in line with the antenna
- There is signal transmitted outside of the beam angle; therefore false targets may be detected

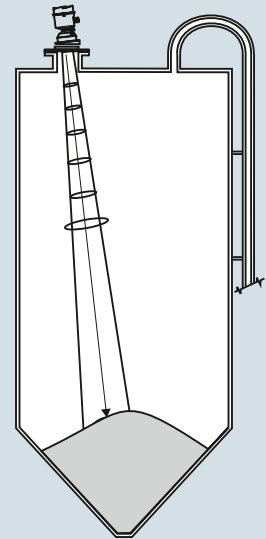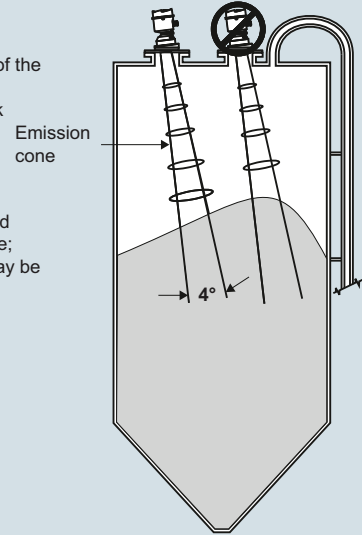

Aiming will assist in measuring material in the cone

SITRANS LR560 installation, dimensions in mm (inch)



Technical specifications

¹⁾ From sensor reference point

Mode of operation

Measuring principle	Radar level measurement
Frequency	78 GHz FMCW
Minimum detectable distance	400 mm (15.75 inch) from sensor reference point
Maximum measuring range ¹⁾	<ul style="list-style-type: none"> • 40 m (131 ft) version • 100 m (328 ft) version

Output

<ul style="list-style-type: none"> • Analog output • Communications 	4 ... 20 mA <ul style="list-style-type: none"> • HART • Optional: PROFIBUS PA • Optional: Foundation Fieldbus
<ul style="list-style-type: none"> • Fail-safe 	<ul style="list-style-type: none"> • Programmable as high, low or hold (Loss of Echo) • NE43 programmable

Performance (according to reference conditions IEC60770-1)

<ul style="list-style-type: none"> • Maximum measured error (including hysteresis and non-repeatability) 	<ul style="list-style-type: none"> • Greater of 25 mm (1 inch) or 0.25 % of range from minimum detectable distance to full range
---	---

Rated operating conditions (according to reference conditions IEC60770-1)

Installation conditions	Indoor/outdoor
<ul style="list-style-type: none"> • Location 	
Ambient conditions (enclosure)	
<ul style="list-style-type: none"> • ambient temperature • installation category • pollution degree 	-40 ... +80 °C (-40 ... +176 °F) I 4

Medium conditions

<ul style="list-style-type: none"> • Dielectric constant ϵ_r 	> 1.6
Process temperature and pressure	See chart below

Design

Enclosure	
<ul style="list-style-type: none"> • Construction • Conduit entry • Purge inlet • Lens material 	316L/1.4404 stainless steel M20x1.5, or 1/2" NPT via adapter 1/8" NPT, 30 cfm at max. 100 psi <ul style="list-style-type: none"> • 40 m version: PEI • 100 m version: PEEK Damage to lens could result from continuous purging/cleaning due to abrasive solids. Recommended purging/cleaning only a few seconds every hour Type 4X/NEMA 4X, Type 6/NEMA 6, IP68 with lid closed
<ul style="list-style-type: none"> • Degree of protection • Weight • Optional local display interface 	3.15 kg (6.94 lb) including 3 inch flange Graphic LCD, with bar graph representing level
Process connections	
Universal flat-faced flanges ²⁾	<ul style="list-style-type: none"> • 3, 4, 6 inch/80, 100, 150 mm, 304 stainless steel • 3, 4, 6 inch/80, 100, 150 mm, 316L/1.4404 or 316L/1.4435 stainless steel
Aimer flanges ²⁾	3, 4, 6 inch/80, 100, 150 mm, polyurethane powder-coated cast aluminum

Power supply

4 ... 20 mA/HART	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
PROFIBUS PA/ FOUNDATION Fieldbus	13.5 mA 9 ... 32 V DC, per IEC 61158-2

Certificates and approvals

General	CSA _{US/C} , CE, FM
Radio	Europe (R&TTE), FCC, Industry Canada, C-TICK
Hazardous	
<ul style="list-style-type: none"> • Europe/International 	IECEx SIR 09.0149X ATEX II 1D, 1/2D, 2D Ex ta IIIC T139 °C Da IP68 ATEX II 3G Ex nA II T4 Gc Ex nL IIC T4 Gc
<ul style="list-style-type: none"> • US/Canada 	FM/CSA Class II, Div. 1, Groups E, F, G Class III T4 FM/CSA Class I, Div. 2, Groups A, B, C, D, T4
<ul style="list-style-type: none"> • China 	NEPSI Ex nA II T4 Ex nL IIC T4 DIP A20 TA, T139 °C, IP68 INMETRO
<ul style="list-style-type: none"> • Brazil 	BR-Ex nA/nL II T4 IP68

Programming

Intrinsically Safe Siemens handheld programmer	Infrared receiver
<ul style="list-style-type: none"> • Approvals for handheld programmer 	IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135 °C Ta = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 Ta = 50 °C
Handheld communicator	HART communicator 375/475
PC	SIMATIC PDM, AMS, PACTware
Display (local)	Graphic local user interface including quick start wizard and echo profile displays

²⁾ Universal flange mates with EN 1092-1 (PN 16)/ASME B16.5 (150 lb)/JIS 2220 (10K) bolt hole pattern.

Process temperature and pressure

Version	Stainless steel	Aimer flange: -1 to 0.5 bar	Aimer flange: -1 to 3.0 bar
40 m	-40 ... +100 °C (-40 ... +212 °F)	-40 ... +100 °C (-40 ... +212 °F)	-40 ... +100 °C (-40 ... +212 °F)
100 m	-40 ... +200 °C (-40 ... +392 °F)	-40 ... +200 °C (-40 ... +392 °F)	-40 ... +120 °C (-40 ... +248 °F)



SITRANS LR560

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
SITRANS LR560	7ML5440-	Further designs	
2-wire, 78 GHz FMCW radar level transmitter for continuous monitoring of solids in silos to a range of 100 m (329 ft).	0 0 -	Please add "-Z" to Article No. and specify Order code(s).	
Order handheld programmer separately		Plug M12 with mating connector ¹⁾²⁾³⁾	◆ A50
Measurement and process temperature range		Plug 7/8" with mating connector ¹⁾³⁾⁴⁾	◆ A55
40 m (131 ft) max range, -40 ... +100 °C	◆ 0	Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:	◆ Y15
100 m (329 ft) max range, -40 ... +200 °C	◆ 1	Measuring-point number/identification (max. 27 characters); specify in plain text	
Process connection		Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	◆ C11
Universal flat-faced flange fits ANSI/DIN/JIS flanges		Inspection Certificate Type 3.1 per EN 10204 ⁴⁾	◆ C12
3 inch/80 mm, 304 stainless steel	◆ A	NAMUR NE43 compliant, device preset to failsafe < 3.6 mA ⁵⁾	◆ N07
4 inch/100 mm, 304 stainless steel	◆ B	Operating Instructions for HART device	Article No.
6 inch/150 mm, 304 stainless steel	◆ C	English	7ML1998-5KB02
3 inch/80 mm, 316L stainless steel	◆ D	German	7ML1998-5KB32
4 inch/100 mm, 316L stainless steel	◆ E	Multi-language Quick Start manual	A5E32052143
6 inch/150 mm, 316L stainless steel	◆ F	This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	
3 inch/80 mm, painted aluminum, with integral aimer ¹⁾	◆ G	Operating Instructions for PROFIBUS PA device	Article No.
4 inch/100 mm, painted aluminum, with integral aimer ¹⁾	◆ H	English	7ML1998-5LT02
6 inch/150 mm, painted aluminum, with integral aimer ¹⁾	◆ J	German	7ML1998-5LT32
Enclosure (with cable inlet)		Multi-language Quick Start manual	A5E32043113
Stainless steel, 1 X 1/2" NPT	◆ A	This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	
Stainless steel, 1 X M20 x 1.5 (plastic gland included)	◆ B	Operating Instructions for Foundation Fieldbus device	Article No.
Pressure rating		English	7ML1998-5LY02
0.5 bar g (7.5 psi g) maximum	◆ 0	German	7ML1998-5LY32
3 bar g (40 psi g) maximum	◆ 1	Multi-language Quick Start manual	A5E32034712
Output/communication		This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	
4 ... 20 mA, HART	◆ A	Accessories	
PROFIBUS PA	◆ B	Hand Programmer, Intrinsically safe	7ML1930-1BK
Foundation Fieldbus	◆ C	Local display interface	7ML1930-1FJ
Approvals		Sun Shield Cover	7ML1930-1FK
General Purpose, CSA _{US/C} , Industry Canada, FCC, CE, R&TTE, C-TICK	◆ A	Housing lid with window	7ML1930-1FL
CSA/FM Class I, Div. 2, Groups A, B, C, D, Class II, Div.1, Groups E, F, G, Class III	◆ B	One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART ⁶⁾	7ML1930-1AP
ATEX II 1 D, 1/2 D, 2 D, 3G Ex nA/nL, CE, R&TTE, C-TICK	◆ C	One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA ⁶⁾	7ML1930-1AQ
Local display interface		SITRANS RD100 Remote display - see Chapter 7	
Without LDI (local display interface)	◆ 1	SITRANS RD200 Remote display - see Chapter 7	
With LDI (local display interface)	◆ 2	SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 7	7ML5750-1AA00-0

¹⁾ Rated to 120 °C max. when used with Pressure rating option 1

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

¹⁾ Available with Approval option A only

²⁾ Available with Enclosure option B only

³⁾ Available with Output/communication options B and C only

⁴⁾ Available with Pressure rating option 1 only

⁵⁾ Available with Output/communication option A only

⁶⁾ Product shipped with plastic cable gland, rated to -20 °C.


If -40 °C rating required, then metallic cable gland is recommended.

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.



SITRANS LR560 Specials

Schematics

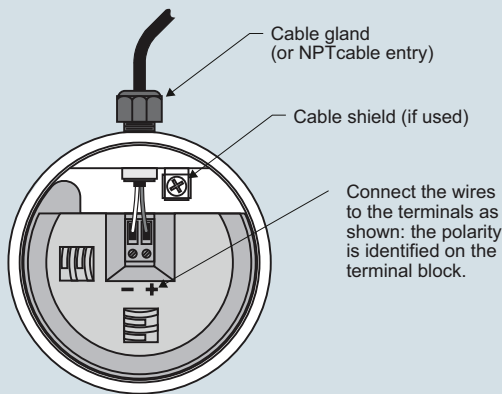

Notes:

1. Depending on the approval rating, glands and plugs may be supplied with your instrument.
2. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
3. All field wiring must have insulation suitable for rated input voltages.
4. Use shielded twisted pair cable (14 to 22 AWG) for HART version.
5. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR560 connections

SITRANS LR560 Specials

	Article No.
LR560 Electronics Modules	
LR560 Electronics Module,HART,100 m range, compatible with 7ML54401XX00XAXX, no enclosure or process connection included.	7ML1830-3AC
LR560 Electronics Module,PROFIBUS PA,100 m range, compatible with 7ML54401XX00XBXX, no enclosure or process connection included.	7ML1830-3AH
LR560 Electronics Module,Foundation Fieldbus,100 m range, compatible with 7ML54401XX00XCXX, no enclosure or process connection included.	7ML1830-3AJ
LR560 Electronics Module,HART,40 m range, compatible with 7ML54400XX00XAXX, no enclosure or process connection included.	7ML1830-3AK
LR560 Electronics Module,PROFIBUS PA,40 m range, compatible with 7ML54400XX00XBXX, no enclosure or process connection included.	7ML1830-3AL
LR560 Electronics Module,Foundation Fieldbus,40 m range, compatible with 7ML54400XX00XCXX, no enclosure or process connection included.	7ML1830-3AM
LR560 Miscellaneous Spare Kits	
Kit, Lid Gasket, EPDM, LR560	7ML1830-3AA
Kit, Wrench for 4" and 6" Aimers, LR560	7ML1830-3AB
Kit, O-rings for 3" Aimer, LR560	7ML1830-3AD
Kit, O-rings for 4" Aimer, LR560	7ML1830-3AE
Kit, O-rings for 6" Aimer, LR560	7ML1830-3AF
Kit, Lid Screw and Purge Plug set with Hex Keys, LR560	7ML1830-3AG
Kit,Lid, No Window, LR560	7ML1830-3AP

Please contact ceg.smpi@siemens.com for special requests.